
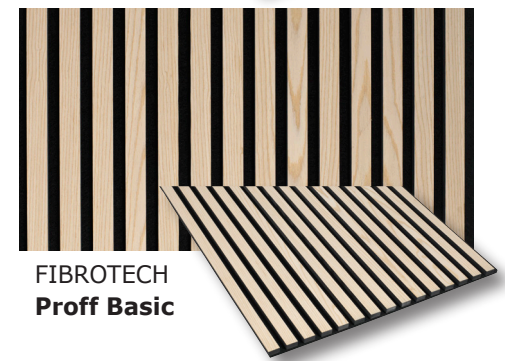


Product information

DATA SHEET

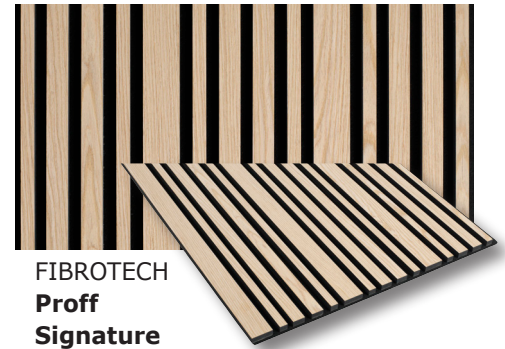

FIBROTECH PROFF ACOUSTIC PANELS

FibroTech PROFF is a serie of 3 meter acoustic panels with good acoustic properties an a new and trendy design. Our PROFF panels are available in two different types:

- **PROFF Basic**, which is the traditional acoustic panel with the same lamella distance.
- **PROFF Signature** has different lamella spacing with a new design and expression.

Both variants are produced in high quality materials: MDF and real wood veneer, which gives them a very beautiful and varied look without any knots.

PROFF Basic acoustic panels are available in the colors:

- Light Oak
- Grey Oak
- Oiled Oak
- Smoked Oak
- Walnut
- Ash

PROFF Signature acoustic panel is available only in Light Oak.

Both variants have the dimension 22x605x3000 mm. The acoustic panels add an aesthetic dimension to the room, gives an edge to the identity and creates a warm expression in the home.

The acoustic absorption of the panels provides a comfortable indoor climate.

FibroTech PROFF acoustic panels can be used on ceilings or walls.

The panels are mounted in the existing fire-approved building, by spot gluing and fastening with screws. When used on ceilings, always use screws for fastening.

It is not recommended to set up the acoustic panels in rooms with high humidity. Use **UNIKA** panels for this purpose.

Be aware that there will be variations and differences in the veneer from production to production, which is why we do not recommend having panels delivered to the same project over several orders and deliveries.



Miljømærket for ansvarligt skovbrug

Contact:

TreeTops A/S
DK-6580 Vamdrup
Tlf.: 70 266 233
info@treetops.dk
www.fibrotech.dk

DATA
ACOUSTIC PANEL

Product information DATA SHEET



FibroTech Acoustic panel – Proff Signature and Basic - 3 mtr.


DB nr.	Product and colour	Dimension	m ² /panel	Weight pr. panel
2122779	Signatur PROFF Acoustic panel Light Oak, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2122780	Basic PROFF Acoustic panel Light Oak, bælack MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2151335	Basic PROFF Acoustic panel Smoked Oak, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2151340	Basic PROFF Acoustic panel Grey Oak, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2151335	Basic PROFF Acoustic panel Oiled Oak, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2151330	Basic PROFF Acoustic panel Walnut, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84
2151347	Basic PROFF Acoustic panel Ash, black MDF core / black polyester	22x605x3000 mm	1,82 / 40 pcs.	pr. pll 16,84

Accessories

2119000	FibroTech Adhesive, cartridge, white	12 pcs./box	300 ml.
2119001	FibroTech Adhesive, bucket, white	4 pcs./box	2,5 kg.
1936643	FibroTech Screw, black, TX 20 - RAL 9005	5,0x45 mm	100 pcs.

Frekvens (HZ)	Sound-absorption
100	0,18
125	0,25
160	0,47
200	0,65
250	0,83
315	0,8
400	0,98
500	1,09
630	1,05
800	1,05
1000	1,16
1250	1,01
1600	0,91
2000	0,83
2500	0,98
3150	1,01
4000	1,09
5000	0,94
NRC	0,95

Sound data:

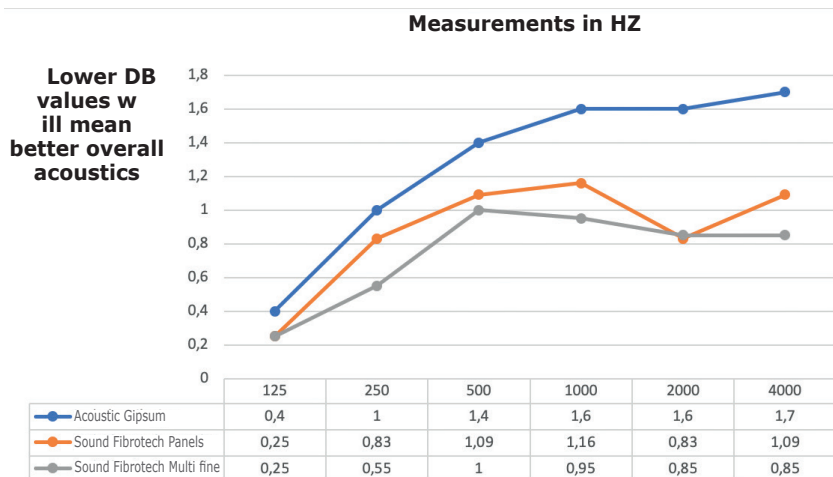

Properties:

Here are the tolerances that are the standard for the acoustic panels.

FIRE:

Reaction to fire:

This type is not fire approved. Shall only be mounted on existing approved constructions.

Polyester: B1

TOLERANCES:

Lenght (mm): +/- 2
 Width (mm): +/- 2
 Thickness (mm): +/- 2
 Weight (%): +/- 10
 Perpendicularity (mm): +/- 2
 Flatnes (mm): +/- 3

Contact:

TreeTops A/S
 DK-6580 Vamdrup
Tlf.: +45 70 266 233
 info@treetops.dk
 www.fibrotech.dk